

iLasW-FR


Integrated Linear Pocket Framing
for Wall Washing



Prefabricated pocket framing provides clean, precise edges for a perfect washing perimeter slot

FEATURES

- Integrated pocket framing system with 6" aperture designed for both drywall and drop ceiling applications.
- Compatible luminaire can be adjusted 30° to wash peak candela down wall
- System designed with access to driver compartment for field maintenance


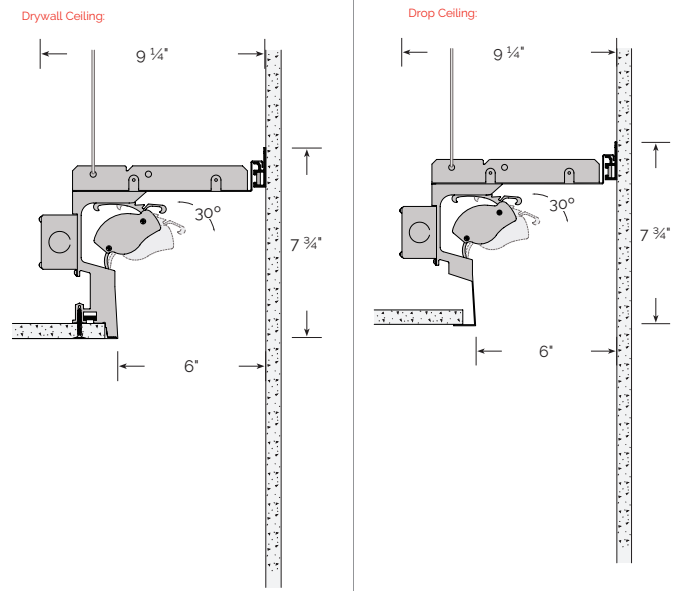


ORDERING

iLasW-FR

<p>PRODUCT</p> <p>iLas® W-FR iLas 6" Pocket Framing for Wall Washing</p>	<p>POCKET LENGTH</p> <p>Please specify run length</p>	<p>CEILING TYPE</p> <p>G Drywall Ceiling D Drop Ceiling</p>	<p>FINISH</p> <p>W White Matte Powder Coat</p>	<p>OUTSIDE CORNERS</p> <p>Specify Quantity</p> <p>iLasW-FR-OC</p>
				<p>INSIDE CORNERS</p> <p>Specify Quantity</p> <p>iLasW-FR-IC</p>
				<p>RIGHT SLIDING SLEEVE</p> <p>Specify Quantity</p> <p>iLasW-FR-RSS</p>
				<p>LEFT SLIDING SLEEVE</p> <p>Specify Quantity</p> <p>iLasW-FR-LSS</p>


DIMENSIONS

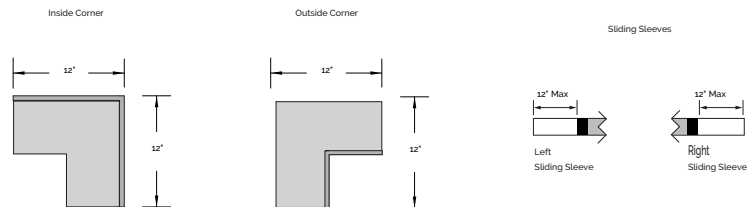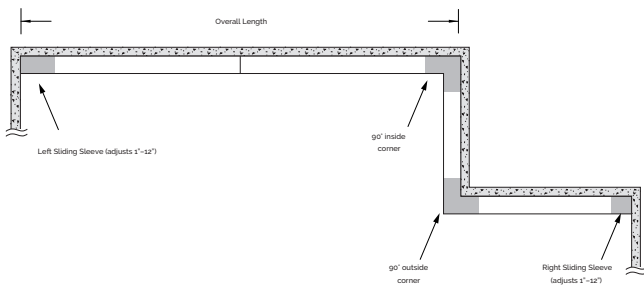

CONSTRUCTION

- 18 gauge fixture suspension brackets and 20 gauge plenum cover
- Total system weight - drywall ceiling: 6 lbs./ft.; drop ceiling: 5 lbs./ft.
- Extruded aluminum main housing with integral horizontal and vertical alignment features
- Standard and optional emergency drivers mounted on wireway covers ship with luminaires. Install with quick connect wiring and quarter turn fasteners

Nominal Length	2FT	3FT	4FT	6FT	8FT
Actual Framing Length	22.875"	34.125"	45.25"	67.75"	90.125"

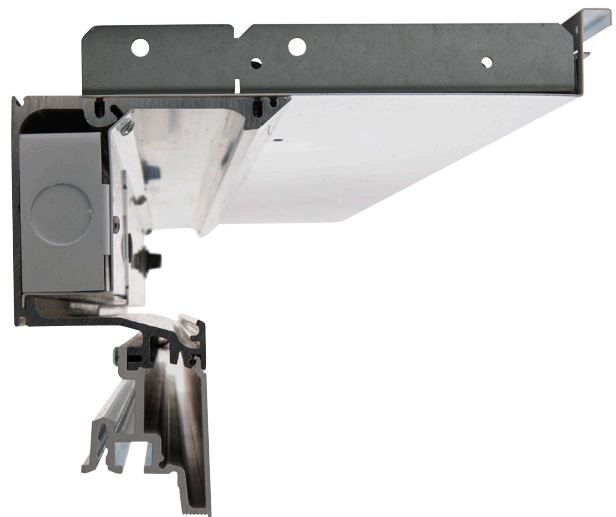

COMPATIBLE GEAR TRAYS

Ordered Separately



iLas
Aimable Indexing Asymmetric
LED Luminaire